

Safety relief valves VSBV 25

Product brochure · GB
2 Edition 08.12



- For gaseous media
- Inlet pressure range up to 4 bar
- Adjustable opening pressure 20–500 mbar
- EC type-tested and certified
- Certified by Gosstandart pursuant to GOST-TR

Application




VSBV 25R40

Safety relief valve for relieving brief pressure surges in control systems thus preventing the safety shut-off valve JSAV from being activated unintentionally. The VSBV reduces too high a pressure increase due to gas creeps which are the result of gas pressure regulators that are not tight closing.

Compulsory for all gas pressure control systems in conjunction with a safety shut-off valve JSAV pursuant to EN 746-2.

Examples of application

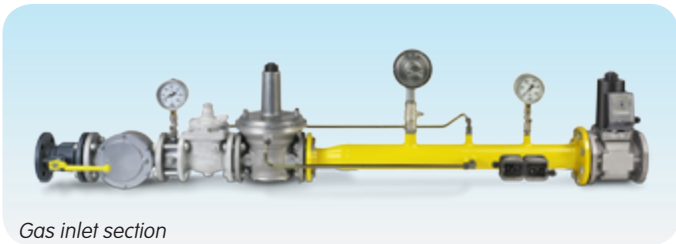

Gas inlet section

Technical data

Gas types: natural gas, town gas, landfill gas, LPG (gaseous) and biologically produced methane (max. 0.02 %-by-vol. H₂S). The gas must be dry in all temperature conditions and must not contain condensate.

Inlet pressure p_U : up to 4 bar.

Accuracy group: AG 10.

Ambient temperature: -15 to +60°C.

Storage temperature: -15 to +40°C.

Valve housing: aluminium,
valve seat and stem: aluminium,
diaphragm: Perbunan,
valve disc: NBR.

Internal thread: Rp 1 to ISO 7-1.

Weight: 1.6 kg.

Maintenance cycles

At least once a year, at least twice a year in the case of biologically produced methane.

Type code

Code	Description
VSBV	Safety relief valve
25	Nominal size
R	Rp internal thread
40	p_U max. 4 bar
-4	Pressure test point at the inlet



elster
Kromschroeder

Detailed information on this product



http://docuthek.kromschroeder.com/doclib/main.php?language=1&folderid=202050&by_class=6

Contact

www.kromschroeder.com → Sales

Elster GmbH
Postfach 2809 · 49018 Osnabrück
Strothweg 1 · 49504 Lotte (Büren)
Germany
T +49 541 1214-0
F +49 541 1214-370
info@kromschroeder.com
www.kromschroeder.com

We reserve the right to make technical modifications in the interests of progress.
Copyright © 2012 Elster GmbH
All rights reserved.